

4




3

2



1

Notes:

- 1. Plastic material: Nylon (Polyamide) 66, Toughened
- 2. Plastic material has UL94 HB rating at 0.81mm, 1.5mm, and 3.0mm reference thicknesses
- 3. Installation onto DIN rail: Clip can be installed top-first (easiest), or bottom-first (with gentle lifting to hook top onto rail)
- 4. Removal from DIN rail: Clip can be removed bottom-first using screwdriver slot, or top-first with gentle lifting to allow unhooking the top from rail. The Flex Stop provides some protection against over-flexing the latch during top-first removal.

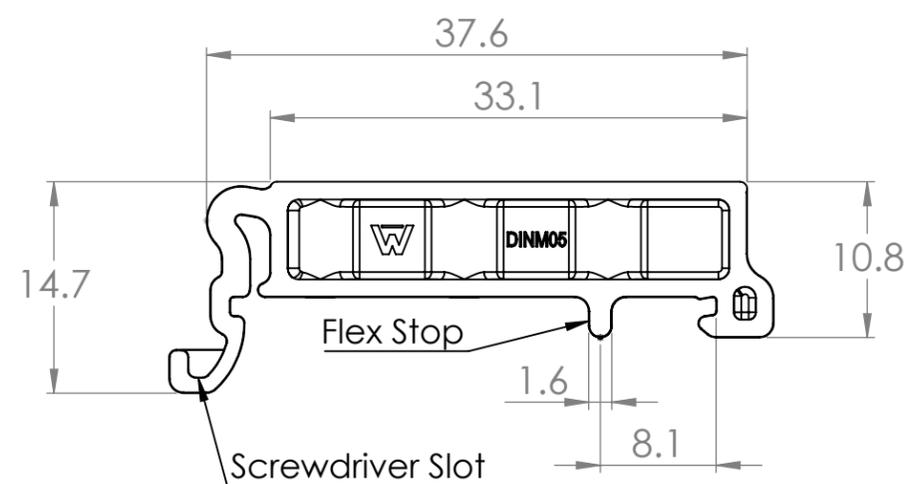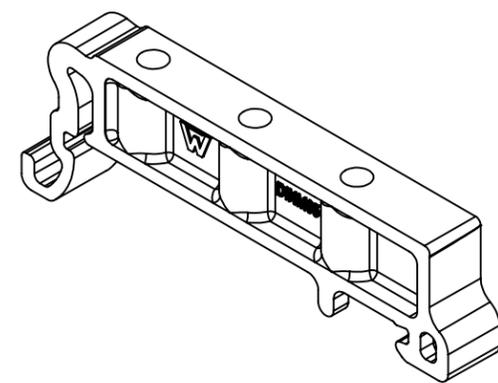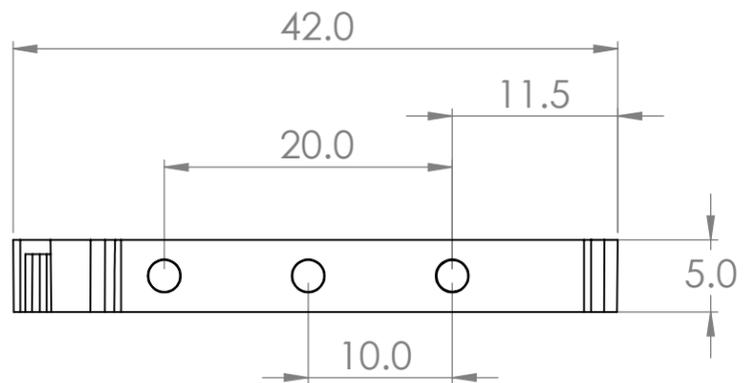


Hole Diameter Suitable For a Coarse-Thread #4 Screw

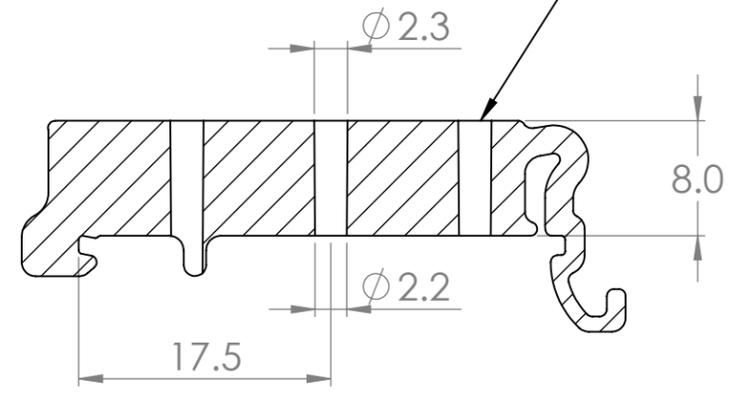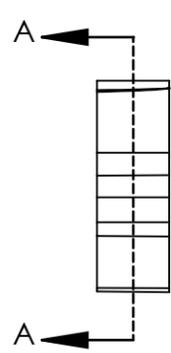

SECTION A-A

Installed On DIN Rail

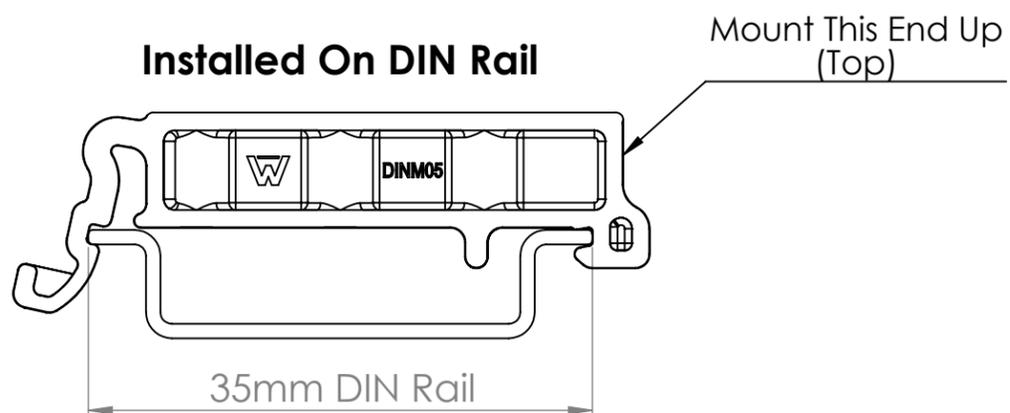

DIM: MM	DATE: 06/21/2022	RoHS COMPLIANT: Yes	DESCRIPTION:
 WINFORD ENGINEERING, LLC 4561 GARFIELD ROAD AUBURN, MI 48611			DIN Rail Mounting Clip, 5mm, Orange
			PART NUMBER (S)
www.winford.com			989-671-9721 DINM05 A

4

3

2

1

B

B

A

A