

RLY304V2 Datasheet


Product Revision: Rev A

Overview


The RLY304V2 provides four SPDT signal relays with convenient screw terminal connections and a 2x5 header for the inputs, and screw terminal connections for the contacts. The board includes active driver circuitry allowing relatively low-current input signals (such as 5V TTL) to be used. LEDs provide visual indication on the status of each relay.

Due to the gold plating on the relay contacts, this relay board is suitable for switching very low-power signals (down to 10uA @ 10mV DC).

The relays used on this board are rated for resistive loads.

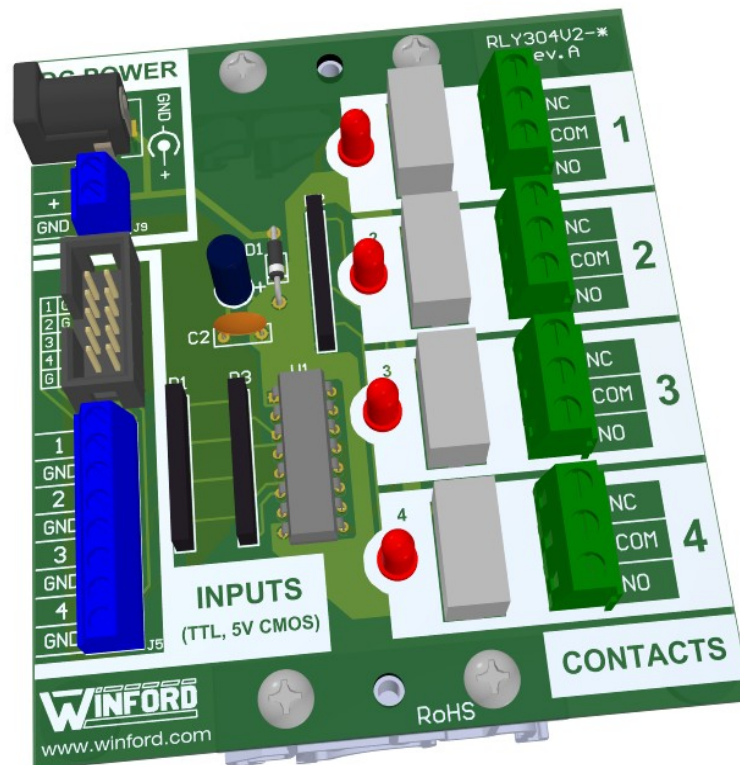**DIN Mounting Option Shown**


Dimensions (typical shown)

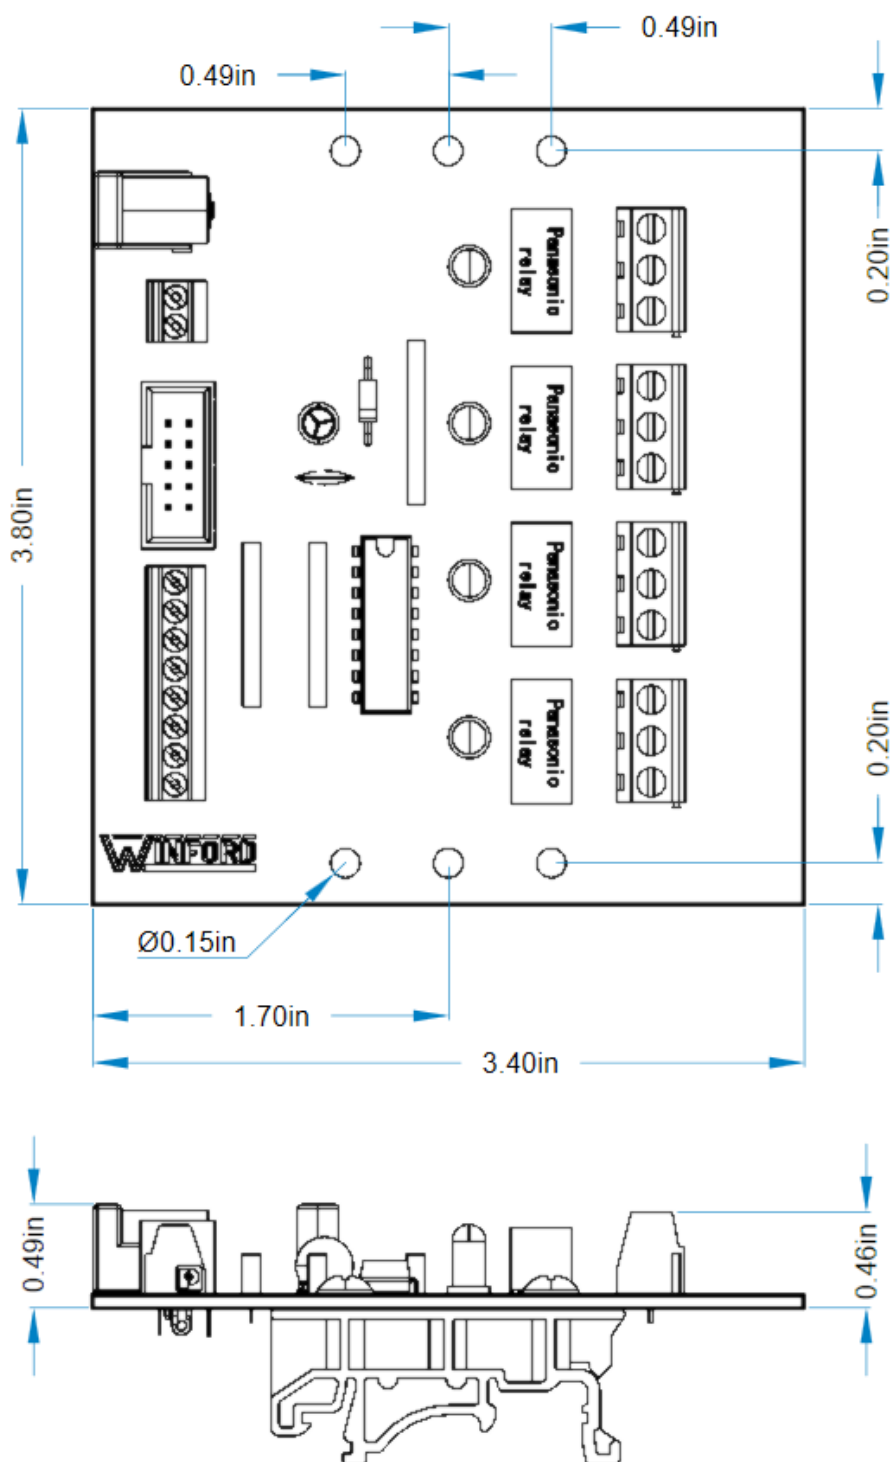

DIN Mounting Option Shown

DC Power Jack

The DC power jack accepts connectors with a 2.1mm inside diameter and 5.5mm outside diameter. The jack requires a center-positive supply.



Part Number Ordering Information

RLY304V2 - -
1 2

1. Relay Coil Voltage (DC)

- 5V
- 12V
- 24V

2. Mounting Option

- **FT** Rubber Feet on bottom side of PCB
- **DIN** DIN Rail Mounting Clips

RLY304V2 Stocked Part Numbers

The following part numbers represent standard options and are stocked:

- RLY304V2-5V-FT • RLY304V2-12V-FT • RLY304V2-24V-FT
- RLY304V2-5V-DIN • RLY304V2-12V-DIN • RLY304V2-24V-DIN

Electrical Characteristics

Specifications at 25°C

<i>Specification</i>	<i>RLY304V2-5V</i>	<i>RLY304V2-12V</i>	<i>RLY304V2-24V</i>	<i>Unit</i>
DC Power Supply Input Range*	4.8 - 6.5	11.5 – 15.5	23 - 30	V
Nominal supply current per activated relay (coil current + LED current) (Power supply: RLY304V2-5V=5.0V, RLY304V2-12V=12.0V, RLY304V2-24V=24.0V)	32	15	9	mA
Maximum leakage current (power supply current with no relays activated)	0.1			mA
Minimum turn-off threshold for input control signals (see diagram below)	0.6			V
Maximum turn-on threshold for input control signals (see diagram)	2.5			V
Maximum allowable input control signal voltage	25			V
Input control signal current requirement, typical (per channel) Input signal @ 2.7V Input signal @ 5.0V Input signal @ 12V Input signal @ 24V	0.35 0.6 1.9 4.2			mA
Relay contact max switching voltage	220V DC, 250V AC			V
Relay contact max switching power (DC, resistive load)	60			W
Relay contact rated switching current (DC, resistive load)	2			A
Relay contact max switching power (AC, resistive load)	60			VA
Relay contact max carrying current rating	3			A
Expected life - Mechanical	Min. 1x10 ⁸			cycles
Expected life – Electrical	Min 1 x 10 ⁵ (2A 30VDC resistive) Min 5 x 10 ⁵ (1A 30VDC resistive) Min 1 x 10 ⁵ (0.5A 125VAC resistive)			cycles

**It is assumed that the DC supply voltage is stable. If the DC supply voltage is changing significantly with time and temperature, then this may impact the operation of the relays. For example, if a relay is continuously operated at max allowed DC supply voltage and max temperature, it is possible that it will need to cool down before operating at minimum DC supply voltage. This is because a relay coil at high temperature will have relatively high resistance, in which case a low DC supply voltage may not be sufficient to achieve the relay coil current necessary to activate the relay.*

Input Control Signal Thresholds Diagram



Operating Conditions

Ambient Temperature Range	-25°C to 50°C
Relative Humidity Range - not freezing or condensing	5% to 85% RH

Screw Terminal Wire Sizes

- Input control signals and Power: 16-26 AWG
- Relay contacts: 16-30 AWG

Component Part Numbers

- Relays: Panasonic Electric Works TX2-xxV-TH (xx = coil voltage)
 - Note that this is a DPDT relay. In this application, it is used as an SPDT relay.
- Relay driver: Toshiba TBD62064APG

Note About Inductive Loads

It is of primary importance to ensure that the relay used in a given application is rated for the given load type (e.g., resistive, inductive) as well as the load current. Although the relays used on this particular product (RLY304V2) may function properly in various inductive-load applications, please note that they are only rated for resistive loads.

Changes

Date	Description
06/16/2026	• First release of datasheet for RLY304V2, which contains Panasonic TX2 relays. • NOTE: Board size remains unchanged from RLY304.

Notices

1. Drawings and specifications are subject to change without notice.
2. Winford Engineering, LLC does not authorize any of its products for use in military, medical or other life-critical systems and/or devices. Life-critical devices/systems include devices or systems which, a) are intended for surgical implantation into the body, or b) support or sustain life and whose failure to perform can be reasonably expected to result in injury. Winford Engineering, LLC products are not designed with the components required, and are not subject to the testing required to ensure a level of reliability suitable for the treatment and diagnosis of people. Winford Engineering, LLC shall not be held responsible or liable for damages or injury that occur as a result of the use of this product.